

# CAT.5e FTP Patch Cord

Part NO. **0133310312**

**ACnetPLUS**  
CABLING SYSTEM

## FEATURES:


All CAT.5e Requirements as Per ANSI/TIA/EIA, ISO/IEC, and CENELEC EN Standards:

1. ANSI/TIA/EIA 568-B.2
2. ISO/IEC 11801 CLASS D+, 2nd Edition
3. CENELEC EN 50173-1
4. CENELEC EN 50288
5. Flame Retardancy is Verified According to IEC 60332-1-2.

We Implemented RoHS Compliance for the Requirement of European Union Issued Directive 2002/95/EC

## CHARACTERISTICS:

Connector	RJ45 Shielded Connector with 50µ Inch Gold Plate	
Housing	PVC Molded with Strain Relief	Option : Snag Proof
Cable	Upon Customers' Request	

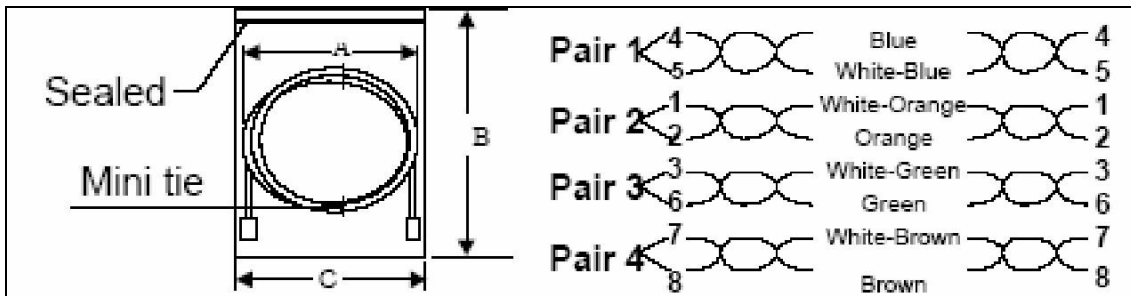

Packing	Length	0.5<X≤3m	4m≤ X <20m
	(A) mm		
	Cable width	180+/-5	180+/-10
	(B×C) mm		
	PE bag size	280×203	305×240

\*Other winding diameters and mini tie positions are available upon customers' request.

## APPROVALS:

3P Certified ANSI/TIA/EIA-568-B.2 Category 5e Testing Performance Requirements.

UL/cUL Listed

# CAT.5e FTP Patch Cord

Part NO. **0133310312**

**ACnetPLUS**  
CABLING SYSTEM

## APPLICATIONS:

- \* 1000BASE-T Gigabit Ethernet
- \* 10BASE-T, 100BASE-Tx Fast Ethernet (IEEE 802.3)
- \* 100 VG - AnyLAN(IEEE802.12), 155/622 Mbps ATM
- \* 550 MHz Broadband Video
- \* Voice, T1, ISDN

## TYPICAL PERFORMANCE:

NEXT	MHz	1	4	8	10	16	20	25	31.25	62.5	100
	dB	60.0	53.5	48.6	47.0	43.6	42.0	40.3	38.7	33.6	30.1

Impedance:  $100\Omega \pm 15\%$

## DRAWING:



\*Molded and snag proof types are both available.

## ORDERING INFORMATION:

Part NO: 0133310312

Description CAT.5e FTP Patch Cord